

- **Ruote d'appoggio**
zincate, tubo Ø 48 mm

- **Jockey wheels**
zinc plated, tube Ø 48 mm

- **Verzinkte Stützräder**
Rohr Ø 48 mm

- **Roues jockey**
zinguées, tube Ø 48 mm




Codice
Code
Bestell NR.
Refer.

FC 242



Codice
Code
Bestell NR.
Refer.

FC 249

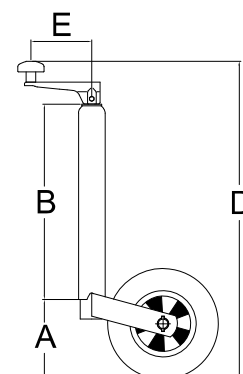

Esempi di applicazione a pag. 83-85
For examples of use see page 83-85
Anwendungsmöglichkeiten auf Seite 83-85
Exemples d'utilisation à page 83-85

| Codice Code Bestell NR. Refer. | Tubo esterno Outer tube Aussenrohr Tube extérieur mm | Corsa della vite Screw stroke Spindelhub Course de la vis mm±10 | Ruote ferro Steel wheels Stahlblechräder Roues acier mm | Ruote gomma Rubber wheels Vollgummiräder Roues avec bandage caoutchouc mm | Peso unitario Unitary weight Einheitsgewicht Poids unitaire kg | Portata statica max Maxi. Static load Maxi. Statische Tragfähigkeit Charge statique maxi kg | A mm | B mm | C mm | D mm | E mm |
|--|--|---|---|---|--|--|---------|---------|---------|---------|---------|
| Modelli Standard - Standard Models - Standardausführungen - Modèles Standard | | | | | | | | | | | |
| FC 241* | Ø 48 | 190 | | 200x50 | 4,1 | 100 | 150 | 350 | | 575 | 110 |
| FC 242** | Ø 48 | 190 | | 200x50 | 4,2 | 150 | 150 | 350 | | 575 | 110 |
| FC 249** | Ø 48 | 195 | | 220x70 | 7 | 150 | 120 | 390 | | 595 | 110 |

* Cerchio plastica - Plastic rim - Kunststoffelge - Jante plastique

** Cerchio metallo - Metal rim - Stahlblechfelge - Jante metal

Articoli personalizzati - Customized solutions - Sonderausführungen - Modèles personnalisée



FC 242-5