

- **Ruote d'appoggio**
con ribaltamento semi-automatizzato e bloccaggio a pedale

- **Wheel jacks**
with semiautomated turnover and pedal locking

- **Stützräder**
mit halbautomatischem Klappvorgang und vorgespannter Feder

- **Roues-béquille**
à relevage semi-automatique et blocage par pédale




Codice
Code
Bestell NR.
Refer.

M 305



Codice
Code
Bestell NR.
Refer.

M 341 LL

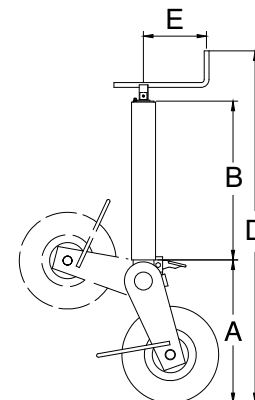

Esempi di applicazione a pag. 83-85
For examples of use see page 83-85
Anwendungsmöglichkeiten auf Seite 83-85
Exemples d'utilisation à page 83-85

Codice Code Bestell NR. Refer.	Tubo esterno Outer tube Aussenrohr Tube extérieur mm	Corsa della vite Screw stroke Spindelhub Course de la vis mm±10	Ruote ferro Steel wheels Stahlblechräder Roues acier mm	Ruote gomma Rubber wheels Vollgummiräder Roues avec bandage caoutchouc mm	Peso unitario Unitary weight Einheitsgewicht Poids unitaire kg	Portata statica max Maxi. Static load Maxi. Statische Tragfähigkeit Charge statique maxi kg	A mm	B mm	C mm	D mm	E mm
Modelli Standard - Standard Models - Standardausführungen - Modèles Standard											
M 300	∅ 70	240	280x80		17,6	1500	430	460		1030	185
M 305	∅ 70	240	310x90		17,8	1500	430	460		1030	185
M 310	∅ 70	240		280x65	19	1200	420	460		1025	185
Modelli a richiesta - Models on request - Ausführungen auf Anfrage - Modèles sur demande											
M 305LL	∅ 70	400	310x90		22	1500	430	700		1270	185
M 341LL	∅ 82	400	400x100		34	1500	535	660		1345	185