


WARNING!
 SECTIONS OF THE ASSEMBLY MARKED ARE NOT SHIELDED AND MUST BE SHIELDED BY AN INTERACTIVE GUARDING SYSTEM. BINACCHI S.p.A. DECLINES RESPONSIBILITY IF PROPER GUARD ARE NOT PROVIDED OR MAINTAINED.



TIPO-TYPE
 Typ

BS

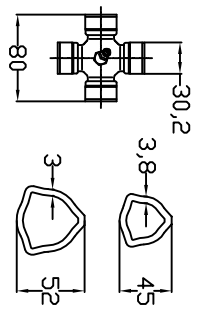

CLIENTE-CUSTOMER-CLIENT-KUNDE

DANI-TECH A/S -DK-

RIF.CLIENTE-CUSTOMER REF.-REF.CLIENT-BEZUG KUNDE


ORIGINE

MODIFICHE-MODIFICATIONS-ÄNDERUNGEN-MODIFICACIONES

POTENZA : 47 Cv (540 g/min)

NOTE :

COPPIA : 620 Nm (540 g/min)

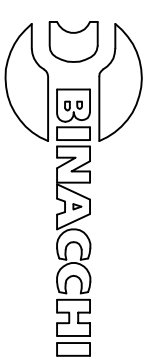

CODICE C.E.D.
 BSN121CEA60A60

DATA
 26/06/13

VISTO