


MIN , 644 MAX , 714

MIN , 420 MAX , 490

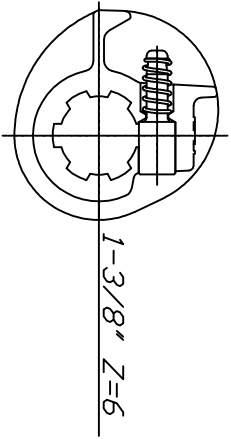

WARNING!
SECTIONS OF THE ASSEMBLY MARKED
AND MUST BE SHIELDED BY AN INTERACTIVE GUARDING SYSTEM
BINACCHI S.r.l. DECLINES RESPONSIBILITY IF PROPER GUARD
ARE NOT PROVIDED OR MAINTAINED.

VERNICIARE NERO



DATA
20/04/16


VISTO

CLIENTE-CUSTOMER-CLIENT-KUNDE
DANI-TECH A/S -DK-

RIF.CLIENTE-CUSTOMER REF.-REF.CLIENT-BEZUG KUNDE
ORIGINE

MODIFICHE-MODIFICATIONS-ÄNDERUNGEN-MODIFICACIONES

TIPO-TYPE
TYP
B5

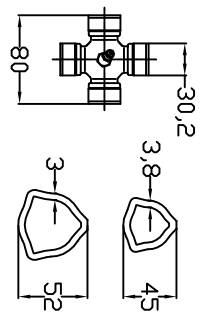

POTENZA : 47 CV (540 g/minh)
COPPIA : 620 Nm (540 g/minh)

NOTE :



CODICE C.E.D.
B5Y042CNA60A60