


BS STANDARD CONNECTIONS

# MR10510

**BSP MALE  
PARALLEL 60° CONE SEAT  
BS5200 / ISO 8434-6**

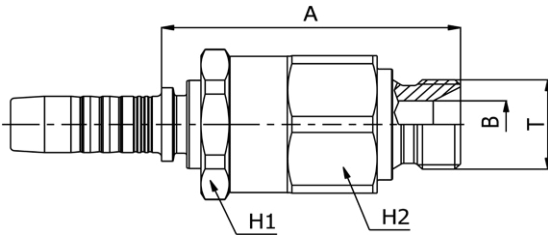


| PART. REF.    | SIZE |      |        | THREAD    | W.P. | DIMENSIONS mm |      |    |    |    |    |  |
|---------------|------|------|--------|-----------|------|---------------|------|----|----|----|----|--|
|               | DN   | Dash | inch   |           |      | T             | MPa  | A  | B  | H1 | H2 |  |
| MR10510-04-04 | 6    | -04  | 1/4"   | 1/4"-19   | 42   | 57.7          | 4.7  | 24 | 24 |    |    |  |
| MR10510-06-06 | 10   | -06  | 3/8"   | 3/8"-19   | 42   | 58.2          | 8.0  | 27 | 27 |    |    |  |
| MR10510-08-08 | 12   | -08  | 1/2"   | 1/2"-14   | 42   | 61.6          | 11.0 | 32 | 32 |    |    |  |
| MR10510-10-10 | 16   | -10  | 5/8"   | 5/8"-14   | 35   | 69.3          | 14.3 | 36 | 36 |    |    |  |
| MR10510-12-12 | 19   | -12  | 3/4"   | 3/4"-14   | 35   | 71.0          | 16.7 | 41 | 41 |    |    |  |
| MR10510-16-16 | 25   | -16  | 1"     | 1"-11     | 35   | 83.0          | 22.2 | 50 | 50 |    |    |  |
| MR10510-20-20 | 31   | -20  | 1.1/4" | 1.1/4"-11 | 35   | 91.9          | 28.6 | 60 | 60 |    |    |  |
| MR10510-24-24 | 38   | -24  | 1.1/2" | 1.1/2"-11 | 28   | 105.1         | 33.3 | 70 | 70 |    |    |  |

BS STANDARD CONNECTIONS

# MR20812

**BSP O-RING  
FEMALE 60° CONE  
BS5200 / ISO 12151-6**

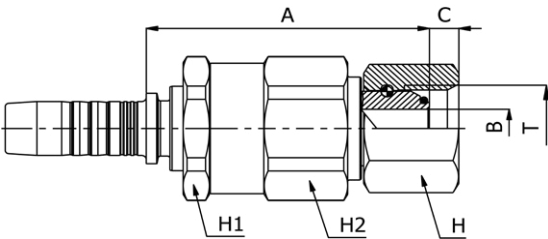

| PART. REF.    | SIZE |      |      | THREAD  | W.P. | DIMENSIONS mm |      |      |    |    |    |    |
|---------------|------|------|------|---------|------|---------------|------|------|----|----|----|----|
|               | DN   | Dash | inch |         |      | T             | MPa  | A    | B  | C  | H  | H1 |
| MR20812-04-04 | 6    | -04  | 1/4" | 1/4"-19 | 42   | 58.0          | 4.3  | 4.1  | 19 | 24 | 24 |    |
| MR20812-06-06 | 10   | -06  | 3/8" | 3/8"-19 | 42   | 59.4          | 7.0  | 5.9  | 22 | 27 | 27 |    |
| MR20812-08-08 | 12   | -08  | 1/2" | 1/2"-14 | 42   | 62.4          | 9.3  | 6.5  | 27 | 32 | 32 |    |
| MR20812-10-10 | 16   | -10  | 5/8" | 5/8"-14 | 35   | 68.0          | 12.5 | 9.7  | 28 | 36 | 36 |    |
| MR20812-12-12 | 19   | -12  | 3/4" | 3/4"-14 | 35   | 70.8          | 15.0 | 8.5  | 32 | 41 | 41 |    |
| MR20812-16-16 | 25   | -16  | 1"   | 1"-11   | 35   | 81.0          | 19.8 | 10.6 | 38 | 50 | 50 |    |